

3000 kg capacity

Reinforced chassis

Fast lift as standard  
(up to 120 kg)

Unique controls

Robust and reliable

Compact and manoeuvrable



## AM 30



### Hand pallet truck (3,000 kg)

The AM 30 hand pallet truck is the ideal solution for all manual transport duties over short distances. Its exceptionally high capacity of 3000 kg allows it to operate in a wide range of applications. Both for heavy and unusually sized loads. This is where its advantages come into play:

- Easy to operate controls – equally comfortable for left and right-handed operators. Manoeuvring with one hand on the tiller arm is both comfortable and safe.
- Standard fast lift (up to 120 kg) for lifting pallets clear of the floor with just three pump strokes.
- Short chassis length offers maximum manoeuvrability in restricted conditions.

The chromed wheel and joint bushings allow for easy pulling or pushing. They feature remarkably quiet running and maintenance-free operation.

# AM 30

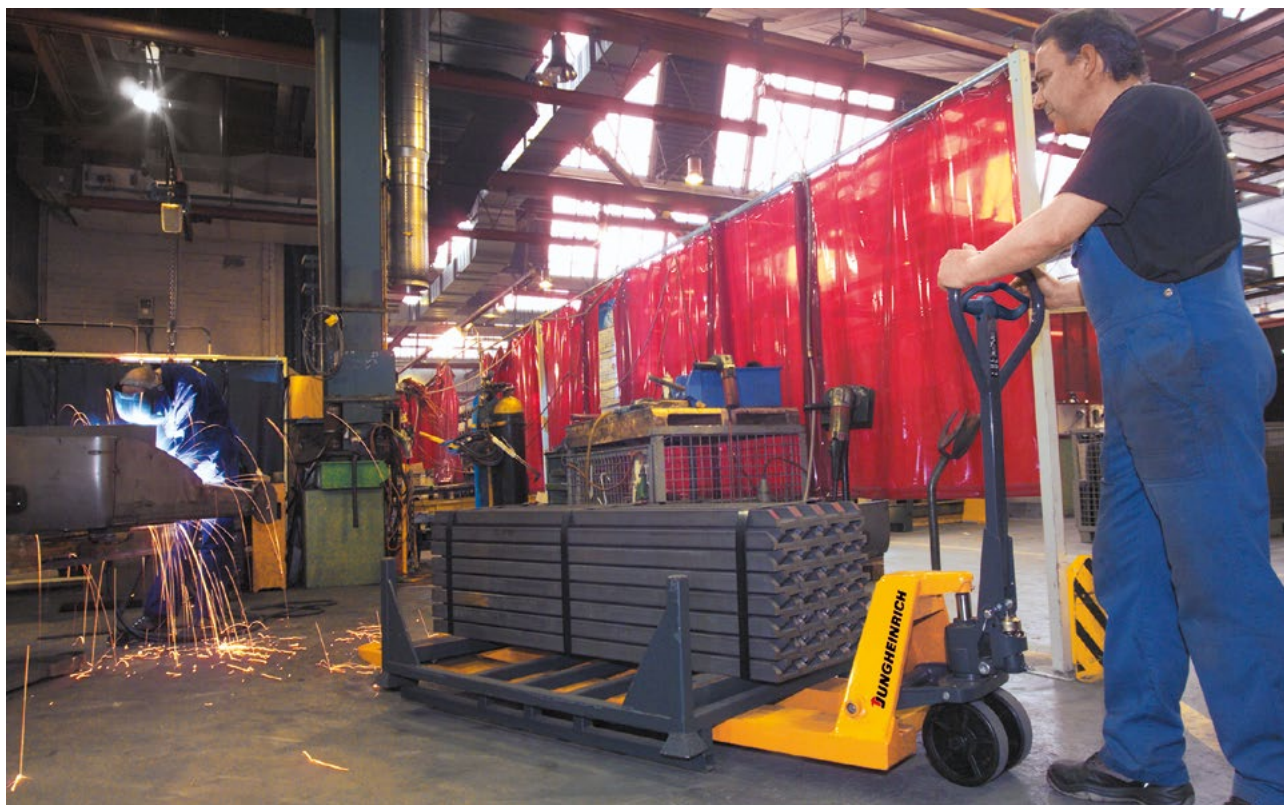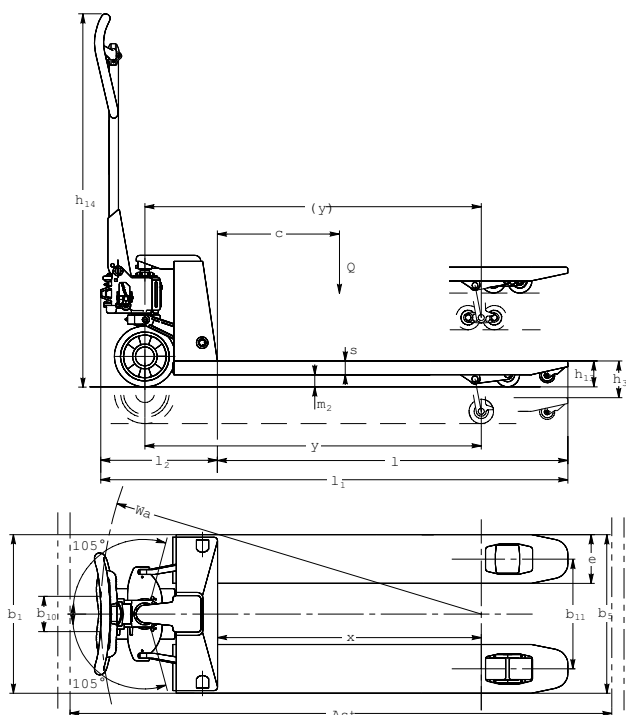

# Technical data in line with VDI 2198

Identification	1.1	Manufacturer (short form)		Jungheinrich	
	1.2	Model		<b>AM 30</b>	
	1.3	Drive		manual	
	1.4	Manual, pedestrian, stand-on, seated, order picker operation		hand	
	1.5	Load capacity/rated load	Q    t	3	
	1.6	Load centre distance	c    mm	600	1050
	1.8	Load distance	x    mm	936	1801
	1.9	Wheelbase	y    mm	1174	2054
Weights	2.1	Service weight	kg	86	142
	2.2	Axle load, w. load, front / rear	kg	815 / 2270	1135 / 2007
	2.3	Axle load, w.o. load, front / rear	kg	28 / 58	57 / 85
Wheels / chassis	3.1	Tyres		V	
	3.2	Tyre size, at front	mm	Ø 200 x 50	
	3.3	Tyre size, at rear	mm	Ø 80 x 70	
	3.5	Wheels, number front/rear (x = driven wheels)		2/4	
	3.6	Track width, front	b <sub>10</sub> mm	116	
	3.7	Track width, rear	b <sub>11</sub> mm	390	
Basic dimensions	4.4	Lift	h <sub>3</sub> mm	120	
	4.9	Height of tiller in drive position min. / max.	h <sub>14</sub> mm	1224	
	4.14	Standing height raised	h <sub>12</sub> mm	205	
	4.15	Lowered height	h <sub>13</sub> mm	85	
	4.19	Overall length	l <sub>1</sub> mm	1603	2483
	4.20	Length incl. back of forks	l <sub>2</sub> mm	383	
	4.21	Total width	b <sub>1</sub> /b <sub>2</sub> mm	550	
	4.22	Fork dimensions	s/e/l   mm	45 / 160 / 1220 <sup>1)</sup>	63 / 160 / 2100 <sup>1)</sup>
	4.25	Width over forks	b <sub>5</sub> mm	550	
	4.32	Floor clearance centre wheelbase	m <sub>2</sub> mm	36	
	4.33	Aisle width for pallets 1000 x 1200 sideways	A <sub>st</sub> mm	1803	2683
	4.34	Aisle width for pallets 800 x 1200 lengthways	A <sub>st</sub> mm	1803	2683
Performance data	4.35	Turning radius	W <sub>a</sub> mm	1319	2184
	5.3	Lower speed, w. / w.o. load	m/s	0.09 / 0.05	

<sup>1)</sup> Other fork lengths available

# Benefit from the advantages



Contoured fork tips for easy pallet entry



Maintenance-free hydraulics



Control handle

## Effortless transport of heavy loads

- Special reinforcement of the load-bearing parts makes the AM 30 ideal for transporting particularly heavy loads.

## Designs for every application

- The different fork lengths available ensure that even loads with extreme centres of gravity can be transported safely.

## Easy to handle

- The easy-to-use controls are equally suitable for both left and right-handed operators.
- The special lowering valve allows loads to be lowered precisely or in small increments.

- The standard fast lift (up to 120 kg) ensures that Euro pallets can be lifted clear of the floor with only 3 pump strokes. Maximum lift height is achieved with only 5 pump strokes.

## Excellent manoeuvrability

- 105° steering angle to each side ensures maximum manoeuvrability, even in narrow aisles or on an HGV.

## Jungheinrich Lift Truck Ltd.

J5 Maynooth Business Campus  
Maynooth Co. Kildare  
Tel. 01 651 7100  
Fax 01 651 7101

info@jungheinrich.ie  
www.jungheinrich.ie

The German production facilities in Norderstedt and Moosburg are certified. **ISO 9001**  
**ISO 14001**

Jungheinrich fork lift trucks meet European safety requirements.



**JUNGHEINRICH**  
Machines. Ideas. Solutions.